

BROADBAND SATELLITE

ABS-6
C BAND


ABS-6

ABS bridges the gap between isolated rural areas and emerging markets to expand the service footprint regardless of distance, geographic obstructions or lack of infrastructure.

The bordering nature of satellite coverage allows operators to locate mobile switching centers (MSC) and base station controller/transceiver (BSC/BTS) combinations anywhere within a wide footprint, giving operators incomparable independence in designing their network.

ABS can help your company stay ahead of the competition by swiftly designing and implementing flexible solutions for your business.



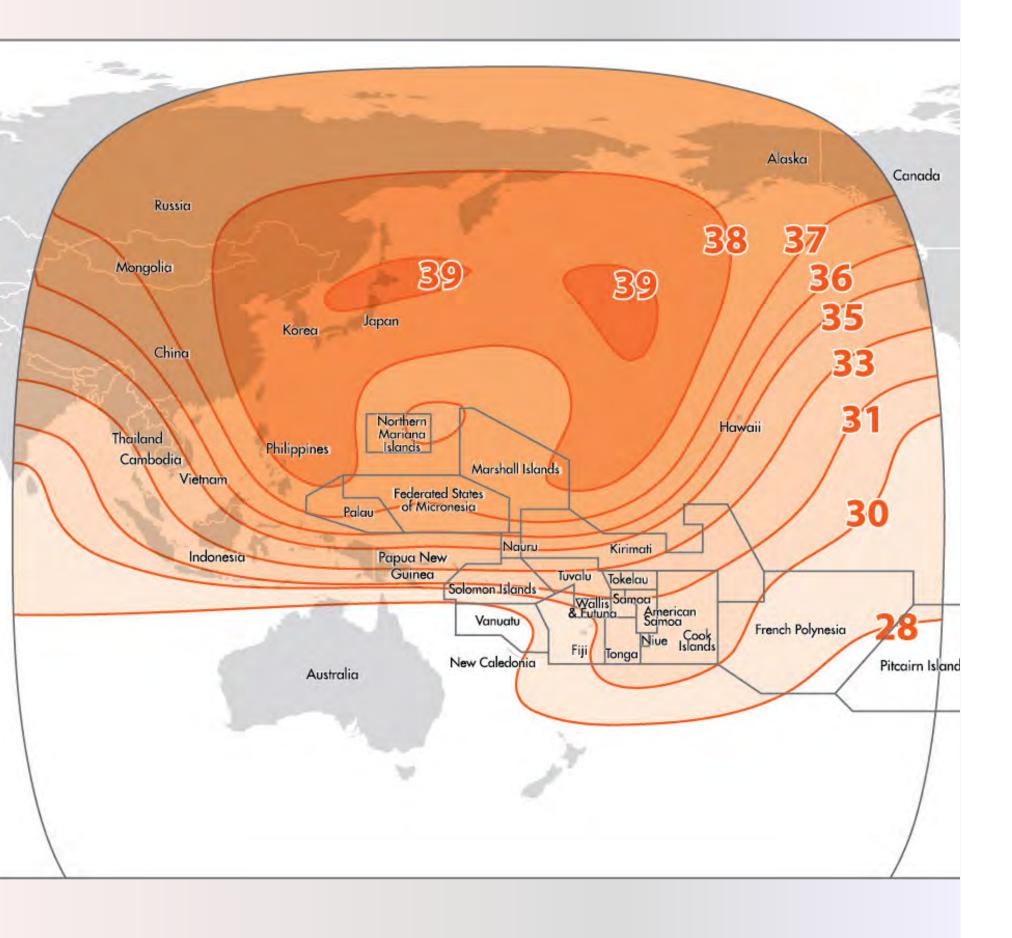

ABS-6

coverage & satellite equipment

Romantis hardware setup:

- *1.8 M Andrews C-Band antenna
- Tx/Rx including Reflector,
- Feed Horn,
- · OMT,
- · NPRM,
- 5 Watt BUC,

Price: 3000 USD

! Note!

2,4M dish is required for dedicated packages. Link Type: SCPC 100% dedicated carrier.

Teleport location including 24 X 7 monitoring: Subic Bay, Philippines.

Price list of two-way Internet (monthly fees in USD)

Bandwidth Capacities	Dedicated
1024 Kbit Up – 1024 Kbit Down	\$ 2 900
1024 Kbit Up – 2048 Kbit Down	\$ 4 350
1024 Kbit Up – 3072 Kbit Down	\$ 5 800
1024 Kbit Up – 4096 Kbit Down	\$ 7 250
1024 Kbit Up – 5120 Kbit Down	\$ 8 700
1024 Kbit Up – 6144 Kbit Down	\$ 10 150
1024 Kbit Up – 7168 Kbit Down	\$ 11 600
1024 Kbit Up – 8192 Kbit Down	\$ 13 050
1024 Kbit Up – 9216 Kbit Down	\$ 14 500
1024 Kbit Up – 10240 Kbit Down	\$ 15 950





TS2 SPACE Sp. z o.o.

LIM Center, 19th floor Aleje Jerozolimskie 65/79 PL 00-697 Warsaw, Poland

Website: https://ts2.space

E-mail: ts@ts2.pl

Phone: +48 226 30 70 70 Fax: +48 226 30 70 71